

Ref #	Hits	Search Query	DBs	Default Operator	Plurals	Time Stamp
L1	366424	"72" and "77"	US-PGPUB; USPAT; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2005/12/06 14:39
L2	1402	717/106-109,137,163-164.ccis.	US-PGPUB; USPAT; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2005/12/06 14:39
L3	2644	class adj library	US-PGPUB; USPAT; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2005/12/06 14:39
L4	132	L2 and L3	US-PGPUB; USPAT; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2005/12/06 14:40
S1	2	"6083276".pn.	US-PGPUB; USPAT; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/11/23 15:17
S2	1082	717/106-109,137,163-164.ccis.	US-PGPUB; USPAT; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/11/26 13:28
S3	5504249	code program library application	US-PGPUB; USPAT; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/11/23 15:19
S4	4908678	generat\$3 creat\$3	US-PGPUB; USPAT; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/11/23 15:19
S5	121960	S3 near S4	US-PGPUB; USPAT; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/11/26 12:24

S6	27428	xml dtd schema	US-PGPUB; USPAT; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/11/23 15:21
S7	125752	template	US-PGPUB; USPAT; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/11/23 15:29
S8	95	S5 same S6 same S7	US-PGPUB; USPAT; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/11/23 15:32
S9	3292	S5 same (S6 S7)	US-PGPUB; USPAT; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/11/23 15:30
S10	2	"6408431".pn.	US-PGPUB; USPAT; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/11/23 15:31
S11	0	S10 and S8	US-PGPUB; USPAT; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/11/23 15:30
S12	0	S10 and S9	US-PGPUB; USPAT; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/11/23 15:31
S13	8	S8 and S2	US-PGPUB; USPAT; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/11/23 15:32
S15	2	"5499371".pn.	US-PGPUB; USPAT; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/11/24 14:14
S16	28	user adj specified adj directory	US-PGPUB; USPAT; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/11/26 08:52

S17	653	specified adj directory	US-PGPUB; USPAT; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/11/24 14:22
S18	1	(specified adj directory) with (generated adj file)	US-PGPUB; USPAT; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/11/24 14:23
S19	86	(directory) with (generated adj file)	US-PGPUB; USPAT; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/11/24 14:23
S20	24342696	@py<="2000"	US-PGPUB; USPAT; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/11/26 12:31
S21	18	S19 and S20	US-PGPUB; USPAT; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/11/24 14:24
S22	5159236	specif\$4 choose\$3 determine\$1	US-PGPUB; USPAT; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/11/26 08:53
S23	1101	user near S22 near (directory file)	US-PGPUB; USPAT; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/11/26 08:54
S24	23	(user near S22 near directory) and (user near S22 near file)	US-PGPUB; USPAT; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/11/26 08:55
S25	539	(web adj service\$2 adj (definition description) adj language) WSDL	US-PGPUB; USPAT; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/11/26 11:36
S26	3443	(uniform adj resource adj (locater identif\$4) URL) with reference	US-PGPUB; USPAT; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/11/26 11:36


S27	9	S25 same S26	US-PGPUB; USPAT; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/11/26 12:22
S28	3160488	migrate update change	US-PGPUB; USPAT; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/11/26 12:35
S29	5509335	code program library application	US-PGPUB; USPAT; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/11/26 12:34
S30	4913136	generat\$3 creat\$3	US-PGPUB; USPAT; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/11/26 12:24
S31	3852958	(source adj code) program library application	US-PGPUB; USPAT; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/11/26 12:35
S33	76590	S30 near S31	US-PGPUB; USPAT; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/11/26 13:23
S34	3546798	detect\$3 find\$3	US-PGPUB; USPAT; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/11/26 13:24
S35	4283754	change\$1 update\$1 modifications	US-PGPUB; USPAT; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/11/26 15:15
S36	5943	compar\$4 near3 version	US-PGPUB; USPAT; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/11/26 13:26
S37	94	S33 same ((S34 near S35) or S36)	US-PGPUB; USPAT; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/11/26 13:32

S38	1	717/106-109,137,163-164.ccls. and S37	US-PGPUB; USPAT; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/11/26 13:33
S39	4450	S33 and ((S34 near S35) or S36)	US-PGPUB; USPAT; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/11/26 13:33
S40	21	717/106-109,137,163-164.ccls. and S39	US-PGPUB; USPAT; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/11/26 13:51
S41	175	("717".clas. and S39) not S40	US-PGPUB; USPAT; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/11/26 13:52
S42	633944	model	US-PGPUB; USPAT; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/11/26 15:15
S43	2	S33 same (((S34 near S35) S36) near S42)	US-PGPUB; USPAT; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/11/26 15:17
S44	8	S33 and (((S34 near S35) S36) near S42)	US-PGPUB; USPAT; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2004/11/26 15:18
S45	928	markup with specification	US-PGPUB; USPAT; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2005/06/13 13:37
S46	240847	generate\$4 with (code dll libary object)	US-PGPUB; USPAT; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2005/06/13 13:38
S47	10	S45 same S46	US-PGPUB; USPAT; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2005/06/13 13:38

S48	56	("4667290" "5528508" "5953526" "5970490" "6012098").PN. OR ("6083276").URPN.	US-PGPUB; USPAT; USOCR	OR	ON	2005/06/13 15:02
S49	55586	message with generat\$4	US-PGPUB; USPAT; USOCR	OR	ON	2005/06/13 15:02
S50	390	message with generat\$4 with xml	US-PGPUB; USPAT; USOCR	OR	ON	2005/06/13 15:02
S51	16	S50 same template	US-PGPUB; USPAT; USOCR	OR	ON	2005/06/13 15:08
S52	306	717/106.ccls.	US-PGPUB; USPAT; USOCR	OR	ON	2005/06/13 15:09
S53	25	S52 and (xml and messag\$5)	US-PGPUB; USPAT; USOCR	OR	ON	2005/06/13 15:09
S54	237	message adj syntax	US-PGPUB; USPAT; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2005/06/15 14:32
S55	1238	717/106-109,137,163-164.ccls.	US-PGPUB; USPAT; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2005/06/15 14:31
S56	1	S55 and S54	US-PGPUB; USPAT; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2005/06/15 14:31
S57	26	S54 same xml	US-PGPUB; USPAT; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2005/06/15 14:35
S58	7485	generate adj code	US-PGPUB; USPAT; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2005/06/15 14:35
S59	22098	generate adj2 code	US-PGPUB; USPAT; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2005/06/15 14:35

S60	0	S59 same S54	US-PGPUB; USPAT; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2005/06/15 14:35
S61	16	S59 and S54	US-PGPUB; USPAT; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2005/06/15 14:36
S62	1761	xml adj schema	US-PGPUB; USPAT; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2005/06/15 14:36
S63	267223	generat\$4 with (code program)	US-PGPUB; USPAT; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2005/06/15 14:37
S64	83	S63 with S62	US-PGPUB; USPAT; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2005/06/15 14:55
S65	7	S64 and S55	US-PGPUB; USPAT; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2005/06/15 14:37
S66	12	("6792466" "6031549" "6341277" "6249755" "6778971" "6823495"). pn.	US-PGPUB; USPAT; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2005/06/15 14:56
S67	6	("6792466" "6031549" "6341277" "6249755" "6778971" "6823495"). pn.	USPAT	OR	ON	2005/06/15 15:02
S68	1	("6209124" "20030212759").pn.	USPAT	OR	ON	2005/06/15 15:11
S69	1	("6792466").pn.	USPAT	OR	ON	2005/06/15 15:12
S70	12	S54 and (gate with generat\$4)	USPAT	OR	ON	2005/06/15 17:06
S71	254	default adj directory	USPAT	OR	ON	2005/06/15 17:08
S72	1238	717/106-109,137,163-164.ccls.	US-PGPUB; USPAT; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2005/06/15 17:07
S73	3	S71 and S72	USPAT	OR	ON	2005/06/15 17:07
S74	693	default adj (directory name)	USPAT	OR	ON	2005/06/15 17:08

S75	27	S74 and S72	USPAT	OR	ON	2005/06/15 17:08
S76	248	language with specific with template	US-PGPUB; USPAT; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2005/12/06 12:37
S77	2644	class adj library	US-PGPUB; USPAT; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2005/12/06 14:39
S78	0	S76 with S77	US-PGPUB; USPAT; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2005/12/06 12:37
S79	1	S76 same S77	US-PGPUB; USPAT; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2005/12/06 12:37
S80	68	generate with S77	US-PGPUB; USPAT; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2005/12/06 12:37
S81	206	generat\$4 with S77	US-PGPUB; USPAT; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2005/12/06 12:38
S82	6	generat\$4 with S77 with template	US-PGPUB; USPAT; EPO; JPO; DERWENT; IBM_TDB	OR	ON	2005/12/06 12:38

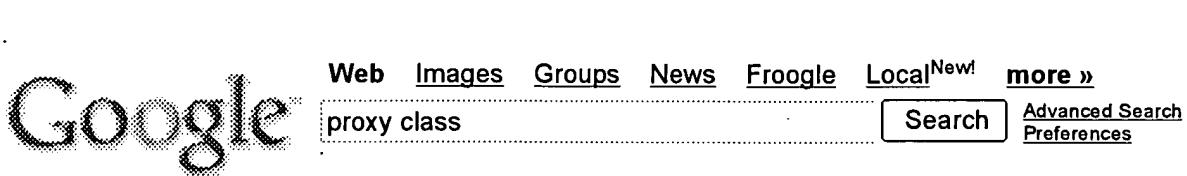

Web

Results 1 - 10 of about 11,500,000 for **proxy class**. (0.24 seconds)

Java 2 Platform SE v1.3.1: Class Proxy

A dynamic **proxy class** (simply referred to as a **proxy class** below) is a class that ... isProxyClass method will return true if it is passed a **proxy class** - a ...

java.sun.com/j2se/1.3/docs/api/java/lang/reflect/Proxy.html - 32k -
 Cached - [Similar pages](#)

Dynamic Proxy Classes

A dynamic **proxy class** is a **class** that implements a list of interfaces ... Thus, a dynamic **proxy class** can be used to create a type-safe **proxy** object for a ...

java.sun.com/j2se/1.3/docs/guide/reflection/proxy.html - 29k -
 Cached - [Similar pages](#)

Creating an XML Web Service Proxy (.NET Framework Developer's Guide)

Fortunately, for XML Web service clients, the **proxy class** handles the work of ... Because the **proxy class** communicates with the XML Web service across the ...

msdn.microsoft.com/library/en-us/cpguide/html/cpconCreatingWebServiceProxy.asp - 23k -
 Cached - [Similar pages](#)

Advanced Basics: Automatically Generating Proxy Classes – MSDN ...

Advanced Basics: Automatically Generating Proxy Classes – MSDN Magazine, February 2003.

msdn.microsoft.com/msdnmag/issues/03/02/AdvancedBasics/ - 29k -
 Cached - [Similar pages](#)

Using Proxy Classes in Java

The **Proxy** is one of the most common design patterns in circulation. Gamma et. al. define the intent of the **Proxy** as: Provide a surrogate or a placeholder ...

www.devx.com/tips/Tip/5274 - 69k - [Cached](#) - [Similar pages](#)

Proxy objects

A **proxy class** is a **class** that implements a list of interfaces specified at compile ...

Compared to the standard **Proxy class**, the generator has the obvious ...
ws.apache.org/jaxme/js/patterns/proxy.html - 20k - [Cached](#) - [Similar pages](#)

Proxy

The actual **Proxy class** code is fairly simple, as you can see. **class** ascb.util.Proxy {. public static function create(oTarget:Object, ...

www.person13.com/articles/proxy/Proxy.htm - 64k - [Cached](#) - [Similar pages](#)

Explore the Dynamic Proxy API

To create an actual dynamic **proxy class**, all you need to do is implement the ... In addition, you can easily use the **proxy class** to implement access control ...

www.javaworld.com/javaworld/jw-11-2000/jw-1110-proxy.html - [Similar pages](#)

Testing a Web service with a proxy class

A good way to test a Web service is by building a **proxy class/client** to consume it. Tony Patton shows you how to develop a simple **proxy class** via .

techrepublic.com.com/5100-3513_11-5755966.html - 49k - [Cached](#) - [Similar pages](#)

rgutils.proxy.Proxy

This will create a mix-in class TProxy inheriting from both **Proxy** and {T}, so instances of TProxy will also be of type T. **Proxy** may itself be subclassed to ...
rgruet.free.fr/rgutils/doc/public/rgutils.proxy.Proxy-class.html - 20k -
[Cached](#) - [Similar pages](#)

Try searching for [proxy class](#) on Google Book Search

Google ►
Result Page: 1 2 3 4 5 6 7 8 9 **10** [Next](#)




Free! Instantly find your email, files, media and web history. [Download now.](#)

[Search within results](#) | [Language Tools](#) | [Search Tips](#) | [Dissatisfied? Help us improve](#)

[Google Home](#) - [Advertising Programs](#) - [Business Solutions](#) - [About Google](#)

©2005 Google

[Sign in](#)

Web Images Groups News Froogle Local^{New!} more »
java.lang.reflect.method [Advanced Search](#) [Preferences](#)

Web

Results 1 - 10 of about 338,000 for [java.lang.reflect.method](#). (0.62 seconds)

[Method \(Java 2 Platform SE v1.4.2\)](#)

Class Method. java.lang.Object extended by java.lang.reflect.AccessibleObject
extended by [java.lang.reflect.Method](#). All Implemented Interfaces:: Member ...

java.sun.com/j2se/1.4.2/docs/api/java/lang/reflect/Method.html - 30k - [Cached](#) - [Similar pages](#)

[Method \(Java 2 Platform SE 5.0\)](#)

AccessibleObject extended by [java.lang.reflect.Method](#). All Implemented Interfaces::
AnnotatedElement, GenericDeclaration, Member ...

java.sun.com/j2se/1.5.0/docs/api/java/lang/reflect/Method.html - 53k - [Cached](#) - [Similar pages](#)

[\[More results from java.sun.com \]](#)

[How to invoke a java.lang.reflect.Method?](#)

How to invoke a [java.lang.reflect.Method](#)? ... Method. How to invoke a
[java.lang.reflect.Method](#)? How to use invoke() of Method with parameters? ...
home.tiscali.nl/~bmc88/java/sbook/056.html - 5k - [Cached](#) - [Similar pages](#)

[TestSuite \(JUnit API\)](#)

private void addTestMethod([java.lang.reflect.Method](#) m, java.util.Vector names,
java.lang. ... private boolean isPublicTestMethod([java.lang.reflect.Method](#) m) ...
junit.sourceforge.net/javadoc/junit/framework/TestSuite.html - 26k - [Cached](#) - [Similar pages](#)

[Method](#)

Object · view java.lang.Object · download java.lang.Object.java extended by
java.lang.reflect.AccessibleObject extended by [java.lang.reflect.Method](#) ...
www.docjar.com/docs/api/java/lang/reflect/Method.html - 38k - [Cached](#) - [Similar pages](#)

[Docjar: java/lang/reflect/Method.java](#)

1 /* [java.lang.reflect.Method](#) - reflection of Java methods 2 Copyright (C) 1998,
2001, 2002 Free Software Foundation, Inc. 3 4 This file is part of GNU ...
www.docjar.com/html/api/java/lang/reflect/Method.java.html - 30k - [Cached](#) - [Similar pages](#)

[reflection: java.lang.reflect.Method](#)

class [java.lang.reflect.Method](#). extends java.lang.reflect.AccessibleObject.
implements java.lang.reflect.GenericDeclaration, java.lang.reflect.Member ...
se.dll.nu/micosize/reflect.jsp?class=java.lang.reflect.Method - 10k - [Cached](#) - [Similar pages](#)

[java.lang.reflect.Method](#)

Documentation > [java.lang.reflect](#) > Method. Method, equals(obj), getDeclaringClass(),
getExceptionTypes(), getModifiers(), getName(), getParameterTypes() ...
alt.textdrive.com/assets/public/docs/java.lang.reflect.Method.cls.html - 15k - [Cached](#) - [Similar pages](#)

[JavaMethod \(Apache Geronimo API\)](#)

getLongSignature. public static java.lang.String getLongSignature(java.lang.Class c,
[java.lang.reflect.Method](#) m). getMethod. public static [java.lang.reflect](#) ...
geronimo.apache.org/api/org/apache/geronimo/interop/util/JavaMethod.html - 22k - [Cached](#) - [Similar pages](#)

[Test Summary: Method.invoke](#)

1, no_args for class gnu.testlet.java.lang.reflect.Method.invoke, true, zardoz, zardoz. 2, no_args for class gnu.testlet.java.lang.reflect. ...
www.object-refinery.com/classpath/mauve/report/java/lang/reflect/Method/invoke.html - 7k -
[Cached](#) - [Similar pages](#)

Try searching for [java.lang.reflect.method](#) on Google Book Search

Google ►
Result Page: 1 [2](#) [3](#) [4](#) [5](#) [6](#) [7](#) [8](#) [9](#) [10](#) [Next](#)

 Google Desktop Search  9:30 AM
Free! Instantly find your email, files, media and web history. [Download now.](#)

[Search within results](#) | [Language Tools](#) | [Search Tips](#) | [Dissatisfied? Help us improve](#)

[Google Home](#) - [Advertising Programs](#) - [Business Solutions](#) - [About Google](#)

©2005 Google